

INDUSTRIAL

PERMEABLE JOINT FILLING AGGREGATE FOR BLOCK PAVING



Permeable JFA (Joint Filling Aggregate) is used for filling joints on block paving, creating a close and tight bond, adding stabilisation of the block paving.

- JFA (The key to a perfect finish)
- JFA ensures that the water can drain away freely through the laying course and sub-base preventing the build-up of surface water
- Non-staining
- Our JFA is an angular aggregate, double washed Granite
- Available in 25kg, bulk bag & loose
- Can be supplied as part of a mixed load

We supply the following grade of aggregate for this application; 1-4mm in size

- Our JFA is grey in colour

Coverage:

60mm Block Thickness = Approx. 4 sqm/25kg bag

80mm Block Thickness = Approx. 3 sqm/25kg bag

INDUSTRIAL



PERMEABLE JOINT FILLING AGGREGATE FOR BLOCK PAVING

PERMEABLE JOINT FILLING AGGREGATE

Particle Size	% retained	% passing
14.00mm	0.0	100.0
10.00mm	0.0	100.0
6.30mm	0.5	99.5
4.00mm	7.1	92.4
2.00mm	75.4	17.0
1.00mm	12.5	4.5
63um	4.0	0.5
-63um	0.5	

TYPICAL ANALYSIS

Moisture Content	n/a
Organic Content	n/a
pH Value (H2O)	n/a
Sat. Hydraulic Conductivity	31500 mm/hr
Fibre Content (pp)	n/a
D90	3900
D10	1800
D90/D10	2.2
D eff	n/a

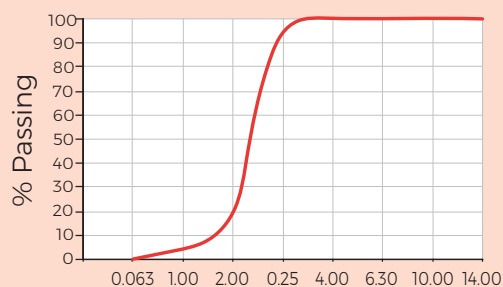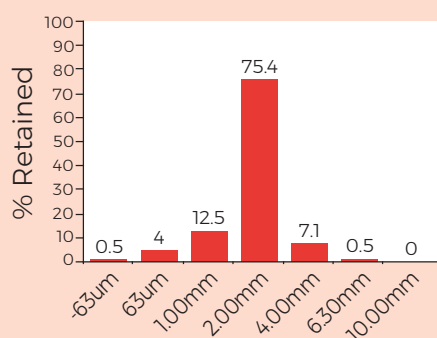

For more information about our Permeable Joint Filling Aggregate
please call **01623 707555**