

INDUSTRIAL

PLASTERING SAND



Plastering Sand

Plaster is a building material used for the protective or decorative coating of walls and ceilings for interiors of buildings, while render commonly refers to external applications, both of which benefit from using a fine grade sand which provides a smooth and clean finish, this sand is commonly referred to within the industry as Plastering or Rendering sand.

- Coverage: Approx L 1m x W 0.7m x D 50mm
- Application: Plastering/Rendering
- Available loose and in bulk bags (suitable for outdoor storage)
- Material (moist)
- Fine sand (see grading)
- Colour and grading (NOT CHANGING)
- Available in bulk bag, loose & tankered
- Can be supplied as part of a mixed load



INDUSTRIAL

PLASTERING SAND

PLASTERING SAND

Category	Particle Size	Typ % retained
	4.00mm	0.0
	2.00mm	0.0
VERY COARSE SAND	1.00mm	1.4
COARSE SAND	500um	9.4
MEDIUM SAND	250um	46.8
FINE SAND	150um	32.1
FINE SAND	125um	5.2
VERY FINE SAND	63um	4.8
SILT	-63um	0.2
CLAY	Clay	0.1

TYPICAL ANALYSIS	
Moisture Content	6.5% w/w
Organic Content	n/a
pH Value (H2O)	6.8
Sat. Hydraulic Conductivity	1145 mm/hr
Fibre Content (pp)	n/a
GFN	n/a
D90	510
D10	145
D90/D10	3.5
D eff	215

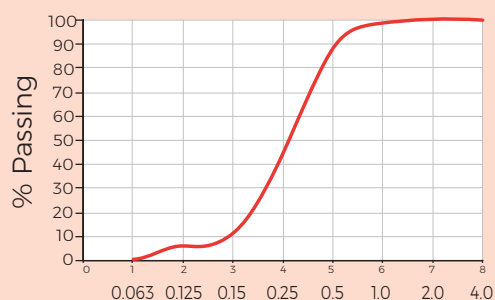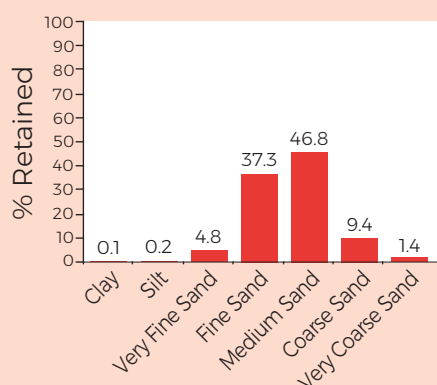

For more information about our Plastering Sand
please call **01623 707555**